

Rinnai HOTFLO Electric Storage Hot Water Systems

Benefits at a glance:

- Full range of capacities to suit all requirements 25 to 400 litres
- Standard sizing perfect for emergency changeover
- Complete range of elements and annodes
- Dual handed
- Suitable for internal and external use (25 & 50L Internal only)
- 7 Year tank warranty on all models*
- Rinnai quality and durability



Product Specifications*



Models		25L	50L	80L	125L	160L	250L	315L	400L
Total Height (mm)	A	452	694	900	1245	1530	1475	1762	1820
Max width Inc. PTR valve		490	490	590	590	590	700	700	760
Total Diameter (mm)	B	415	415	515	515	515	625	625	685
Outlet Height (mm)	C	297	524	683	1020	1310	1215	1430	1512
Inlet Height (mm)	D	153	158	225	225	225	90	90	260
Electrical Entry (mm)	E	70	75	155	155	155	50	50	155
Dry Weight (kg)		20	27	43	56	66	84	94	102

Shipping Specifications*







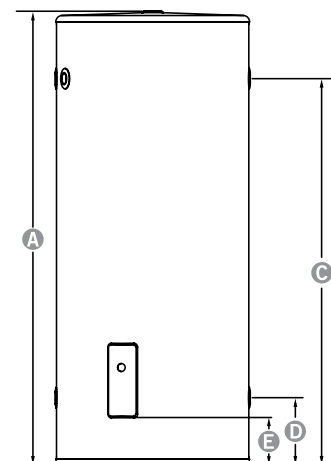



Models	25L	50L	80L	125L	160L	250L	315L	400L
Carton Height (mm)	545	785	993	1334	1619	1554	1840	1914
Carton Width (mm)	440	440	527	527	527	637	637	697
Carton Depth (mm)	440	440	527	527	527	637	637	697
Carton Gross Weight (kg)	23	29	47	60	71	93	109	131

Warranty*

Models	EHF25	EHF50	EHF80	EHF125	EHF160	EHF250	EHF315	EHF400
Parts & Labour	1 Year							
Cylinder	7 Years							



Technical Specifications*

	25L	25L with plug	50L	50L with Plug	80L	125L	160L	250L	315L	400L
HOTFLO Electric Range										
Storage capacity (L)	33	33	55	55	84	140	179	271	336	424
Hot water delivery (L)	25	25	50	50	80	125	160	250	315	400
Element Size (kW)*	3.6 [#]	1.8, 2.4 [#]	3.6 [#]	1.8, 2.4 [#]	1.8, 2.4 [#] , 3.6 [#]	1.8, 2.4 [#] , 3.6 [#]	1.8, 2.4 [#] , 3.6 [#]	2.4 [#] , 3.6 [#] , 4.8	3.6 [#] , 4.8	3.6 [#] , 4.8
PTR valve (kPa)	1000							850		
ECV (kPa)	850							700		
Max. inlet pressure with ECV (kPa)	680							550		
PLV with ECV (kPa)	500							500		
Max. inlet pressure without ECV (kPa)	800							680		
PLV without ECV (kPa)	500							500		
Thermostat setting (MAX)	75°C									
Ingress protection rating (AS 1939)	IPX4									
Electrical supply	240V ~ @ 50Hz									
Electrical connection	Terminal block	10A plug and cord set	Terminal block	10A plug and cord set	Terminal block					
Colour	Tank body - White Port surrounds - White Plug & Cord set - Black (on specified models only)				Tank body - Dune Port surrounds - Dune					
Port connections	All RP¾" (20mm)									

Hard water annodes available on most models.

Package Includes*

Tank	25L	50L	80L	125L	160L	250L	315L	400L
Instruction Manual	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
PTR Value	1 x 1000kPa	1 x 1000kPa	1 x 1000kPa	1 x 850kPa	1 x 850kPa	1 x 850kPa	1 x 850kPa	1 x 850kPa
Brass Plugs	3 x R¾/20	3 x R¾/20	2 x R¾/20	2 x R¾/20	2 x R¾/20	2 x R¾/20	2 x R¾/20	2 x R¾/20
Adaptors	1 x R¾/20 to RP½/15	1 x R¾/20 to RP½/15	4 x R¾/20 to RP¾/20	4 x R¾/20 to RP¾/20	4 x R¾/20 to RP¾/20	4 x R¾/20 to RP¾/20	4 x R¾/20 to RP¾/20	4 x R¾/20 to RP¾/20
			1 x R¾/20 to RP½/15	1 x R¾/20 to RP½/15	1 x R¾/20 to RP½/15	1 x R¾/20 to RP½/15	1 x R¾/20 to RP½/15	1 x R¾/20 to RP½/15

* **Please note:** Rinnai Australia reserves the right to make modifications and change specifications without notice. However, we will endeavour to communicate major changes well before implementation. Dimensions are subject to production tolerances and may vary slightly from those given. For full definitions of Domestic and Commercial use along with the full warranty conditions and exclusions, please refer to the owners manual.

Rinnai

RINNAI AUSTRALIA PTY. LTD

ABN 74 005 138 769

10-11 Walker Street Braeside VIC 3195

For further information visit

www.rinnai.com.au or call 1300 555 545

15.13_MARCH